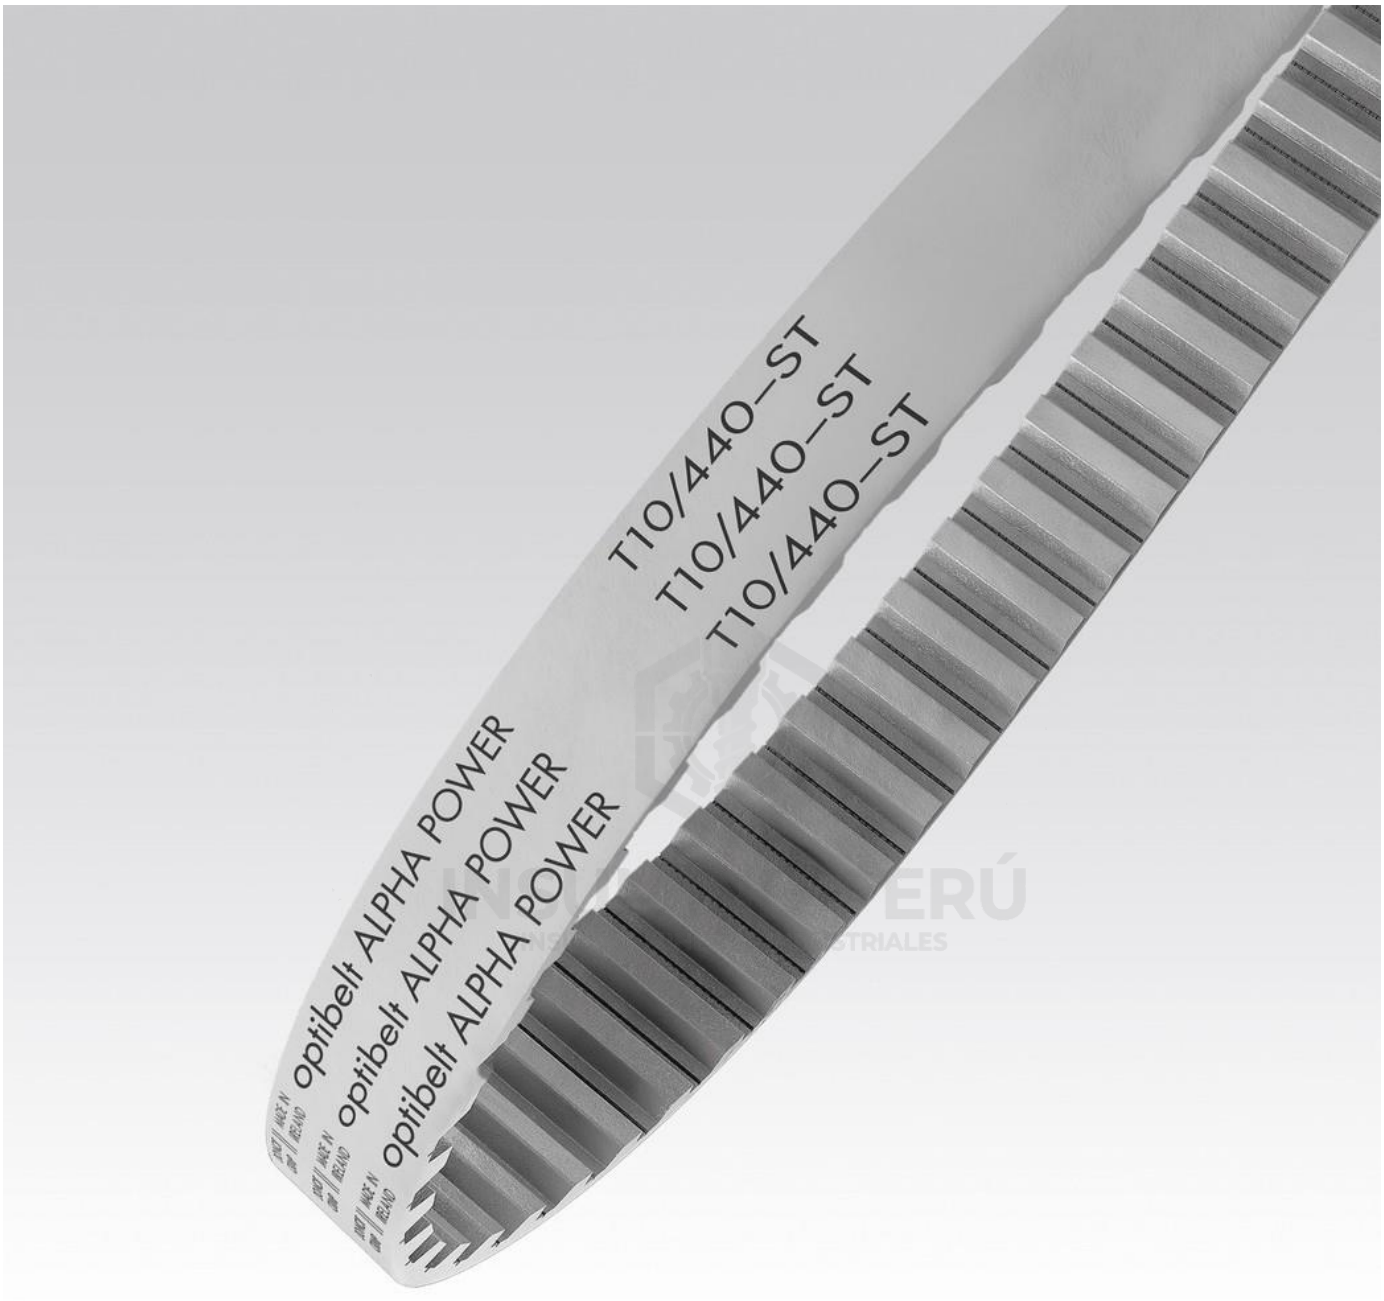

optibelt ALPHA POWER
optibelt ALPHA POWER
optibelt ALPHA POWER
T10/440–ST
T10/440–ST
T10/440–ST

optibelt ALPHA POWER

High performance, endless timing belts made of cast polyurethane

Configure your product

PROFILE

T5

PRODUCT DESCRIPTION

SL 380 T5 /560 AP

WIDTH

25

*The value needs to be between 5 and 380. Only multiples of 1 are allowed.

LENGTH (MM)

560

INSUMIND PERÚ
INSUMOS MINEROS INDUSTRIALES

To view prices and availabilities please log in with your myOptibelt account.

DESCRIPTION

30 % more power

With a new, more resistant and durable polyurethane compound, this generation - compared to the previous optibelt ALPHA TORQUE - has a performance increase of up to 30 %.

Economical: reduced costs and perfect interaction

The optibelt ALPHA POWER enables more compact drive solutions that reduce costs even when purchasing new belts and pulleys.

Flexible use

The optimized interaction of the components polyurethane with a hardness of 88 Shore A and steel cord guarantees that the optibelt ALPHA POWER is a highly economical solution for a wide range of applications.

INSUMIND PERÚ
INSUMOS MINEROS INDUSTRIALES

DETAILS

TECHNICAL INFORMATION

Product description		SL 380 T5 /560 AP	
Product description PTDA		380T5/560AP	
Customs tariff number		39269097	
Material-Number		1799520	
Unit (ISO)		MMT	
Productgroup		optibelt ALPHA POWER	
Price per	Width	millimeter	380
Profile	Width	T5	380
Width (mm)	Length (mm)	380	560