BALL VALVE 2 PC FULL PORT
CF8M (316) 1000 CWP (WOG) RPTFE NPT




* Reference photo

Pressure rating: 1000 CWP (WOG) (non-shock)
Steam rating: 150 PSI WSP
Investment cast body G cap
Blow-out-proof stem adjustable stem
Adjustable stem packing
Stainless steel handle with vinyl grip and locking system
Threaded NPT ANSI/ASME B1.20.1
Optional Seat POLYFILL
Test standard: API 598

MATERIAL LIST


	PART NAME	MATERIAL
1	NUT	SS 316
2	SPRING WASHER	SS 316
3	STEM	ASTM A276 GR. 316
4	HANDLE	STAINLESS STEEL
5	GLAND NUT	SS 316
6	PACKING	PTFE
7	THRUST WASHER	PTFE
8	CAP	ASTM A351 CF8M (316)
9	GASKET	PTFE
10	SEAT	RPTFE / OPTION POLYFILL
11	BALL	ASTM A351 CF8M (316)
12	BODY	ASTM A351 CF8M (316)

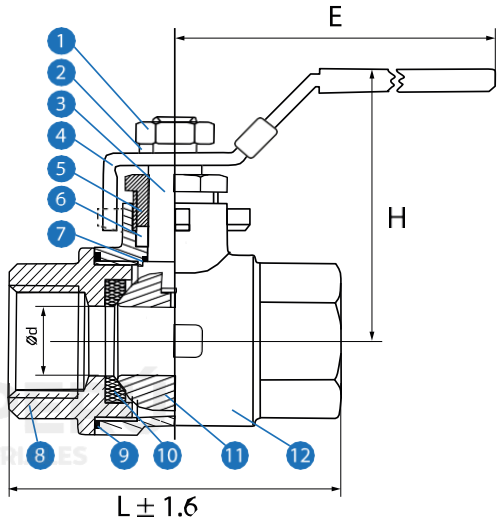

DIMENSIONS (mm)

SIZE	d	H	E	L	WEIGHT (Kg)
1/4"	10.5	50	95	55	0.23
3/8"	12	50	95	55	0.23
1/2"	15	60	95	60.5	0.28
3/4"	20	64	115	70	0.44
1"	25	71	135	81	0.68
1 1/4"	32	78	150	94	1.20
1 1/2"	38	86	160	104	1.52
2"	49	95	180	121	2.30
2 1/2"	62	130	230	148	4.10
3"	76	148	250	162	6.53
4"	96	180	285	200	9.75

PRESSURE TEMPERATURE RATINGS

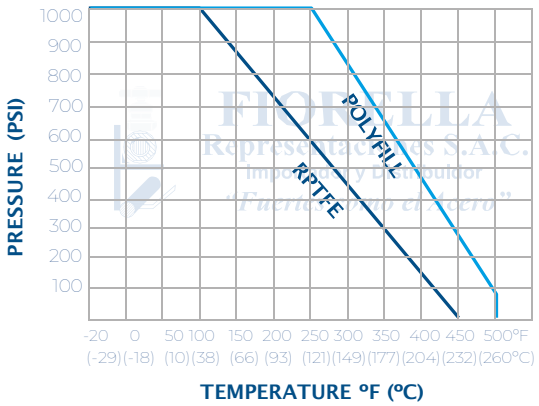

** Note : Dimensions, design and materials are subject to change without notice.*

MAC - MMXXIV