
CHECK VALVE CAST IRON CLASS 125

cod. 856673



* Reference photo

Standar Design MSS SP-71 Type 1
ASME B16.10, ASME B16.1
Phonographic face flange

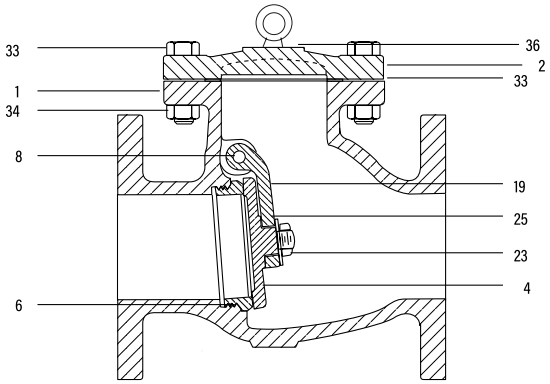


MATERIALS

	PART NAME	MATERIAL
1	BODY	Cast Iron ASTM A126 Class B
2	CAP	Cast Iron ASTM A126 Class B
4	DISC	Cast Iron ASTM A126 Class B + Bronze
6	SEAT RING	Bronze ASTM B584 C84400
7	DISC RING	(8"-12") Bronze ASTM B584 C84400
8	HINGE PIN	(2"-8") Alum Silicon Bronze ASTM B150 C64200
		(10"-12") Naval Brass ASTM B21 C48200
19	HINGE	(2"-6") Bronze ASTM B584 C84400
		(8"-12") Ductile Iron ASTM A536 Gr. 65-45-12
23	DISC NUT	(2"-6") Brass ASTM B16 C36000
		(8"-12") Steel ASTM A563 Gr. A
24	SIDE PLUG	Brass ASTM B16 C36000
25	DISC WASHER	(2"-6") Brass ASTM B36
		(8"-12") Steel
28	HINGE PIN BUSHING	Brass ASTM B16 C36000
32	BONNET GASKET	Aramid Fibers with SBR Binder
33		(10"-12") Ductile Iron ASTM A536 Gr. 65-45-12
34	BONNET GASKET	Aramid Fibers with SBR Binder
35	CAP BOLT	Carbon Steel ASTM A307 Gr. B
47	CAP BOLT NUT	Carbon Steel ASTM A563 Gr. A
48	IDENTIFICATION PLATE	Aluminum

INSUMIND PERÚ
INSUMOS MINEROS INDUSTRIALES

DIMENSIONS (mm)



SIZE	B	M	WEIGHT (Kg)
2"	114	203	12.00
2 1/2"	137	216	17.00
3"	149	241	20.50
4"	168	292	35.50
5"	197	330	53.00
6"	210	356	72.50
8"	260	495	119.00
10"	305	622	203.50
12"	349	699	311.50

* Note : Dimensions, design and materials are subject to change without notice. Approximate weights.